






GLOBE PANEL INDUSTRIES INDIA PVT. LTD AN ISO 9001 : 14001 CERTIFIED COMPANY E-mail : globepanel@gmail.com

CUSTOMER CARE: Toll Free No. : 18002701201 Phone No. : 08199950343, 08222888544 E-mail : customercare@globepanel.in



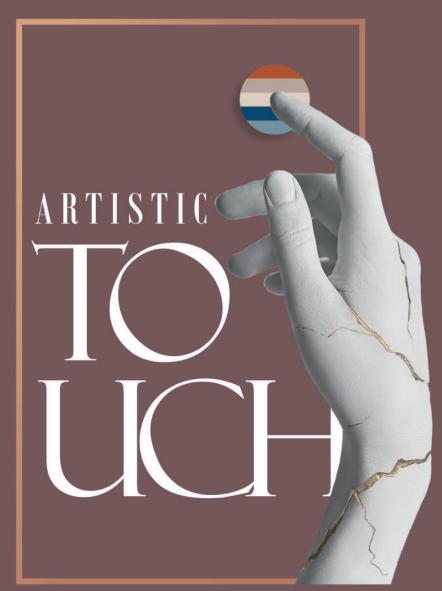

Encourage your decor with our talent and creative laminates.



Crayons represents fresh breath of air in the laminates industry with our innovative bent in all aspects of the business. our laminates collection represents the latest in contemporary designs because we look to the global design industry at large. our service is unparalleled as we work closely with every architect, designer and developer, providing prompt response and excellent sales support. our quality of high pressure laminates is now well–known throughout the industry as they are manufactured under stringent control, the is due in no small part to our pursuit of perfection. it's all about being inspired, you can see the result in our products you can even feel it through our ongoing product design and development process, which underscores our commitments to innovation and getting you closer to nature.



Encourage your decor with our talent and creative laminates.





GRACEFUL

FLUTE • 01-06

DIAMOND • 07-10

CHIFFON • 11-14


real leather • 15-18


SUPER MATT • 19-28

HIGH GLOSS • 31-38

INDEX




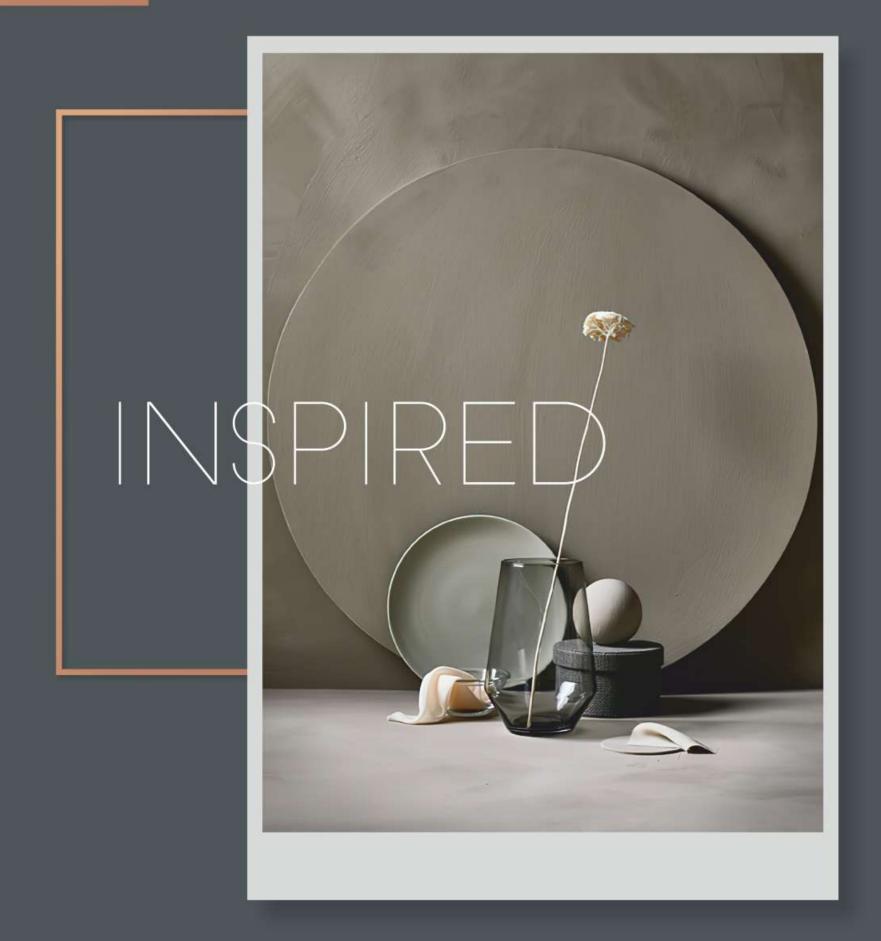

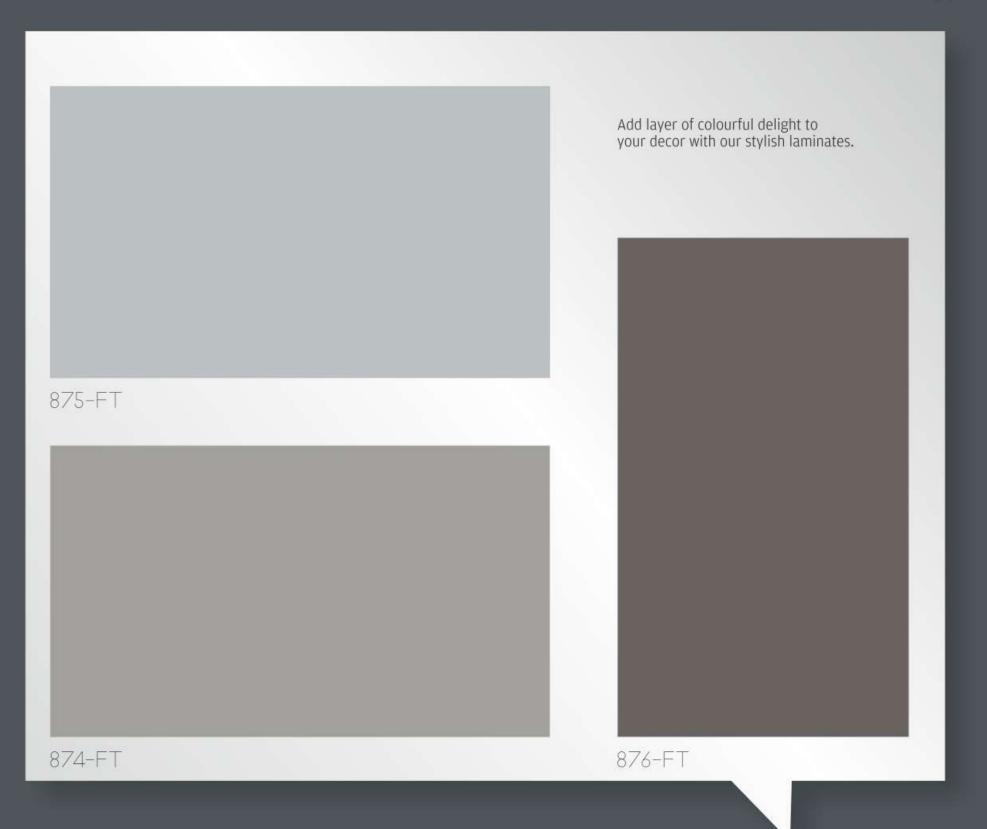

FT 01-02


### FLUTE

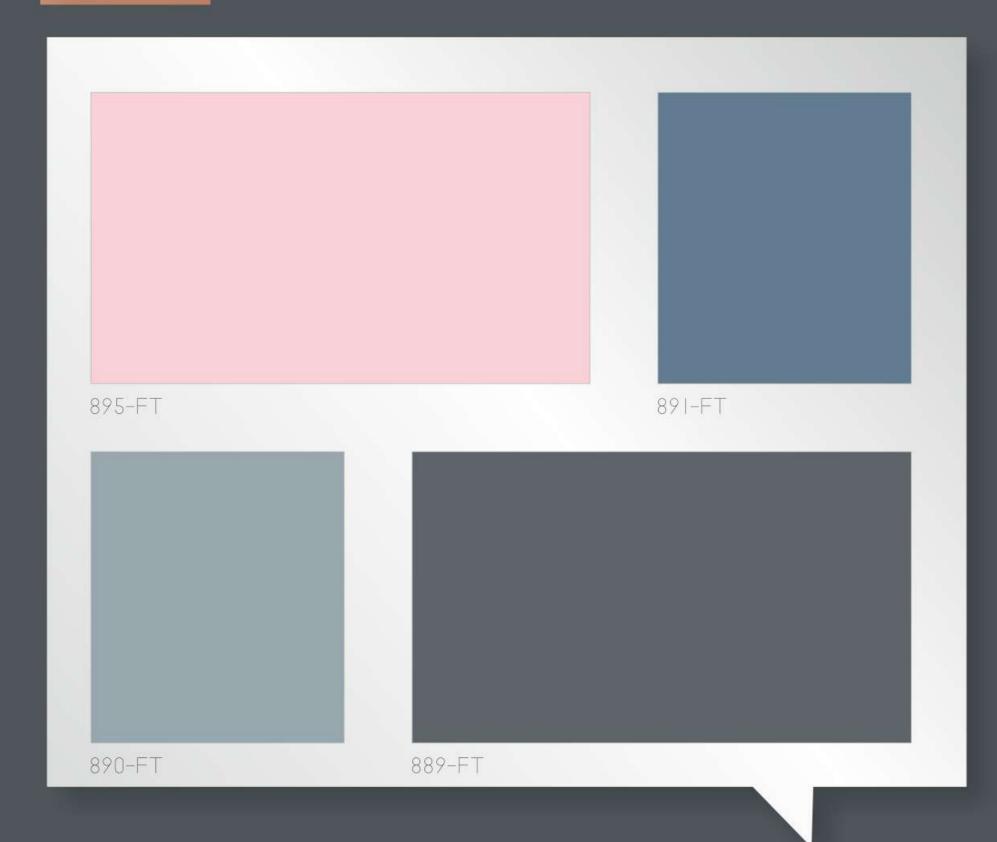




FT 03-04



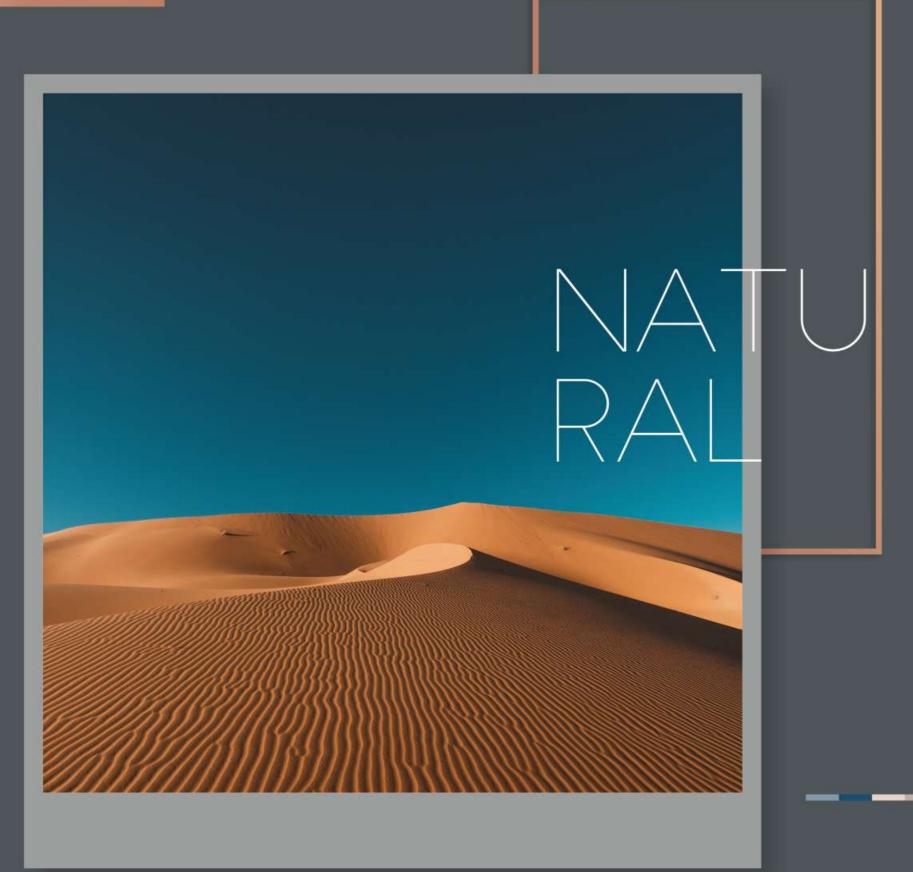




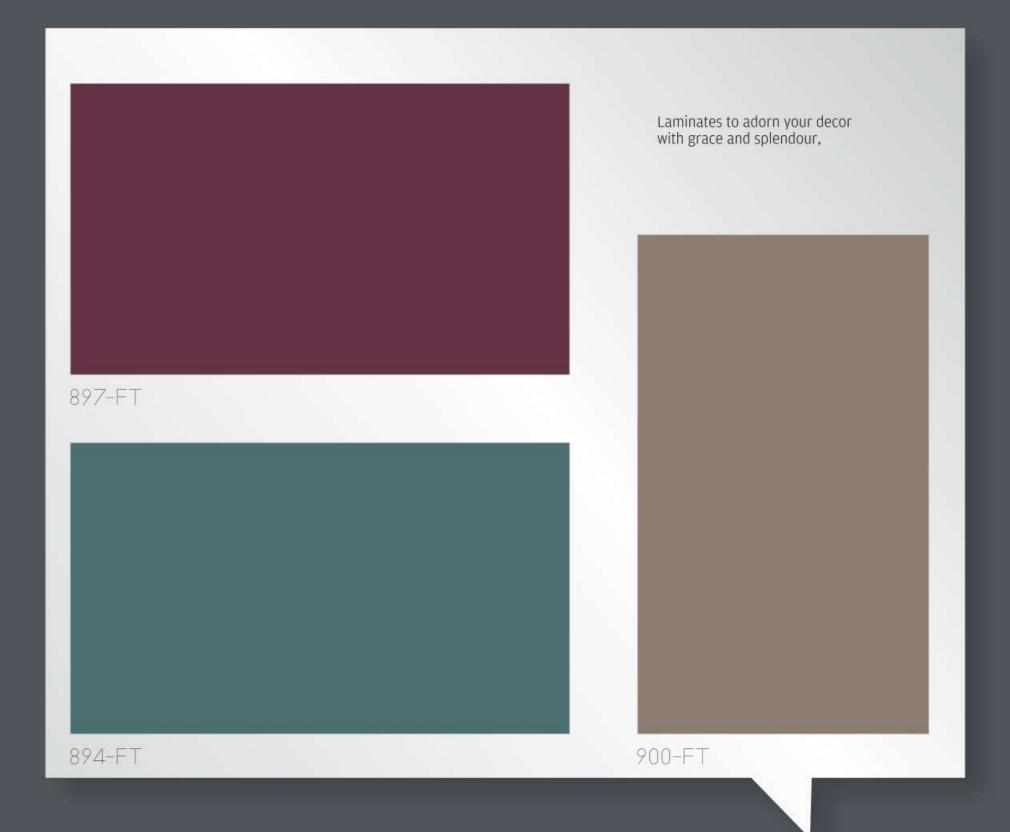

FT 05-06

### DIAMOND




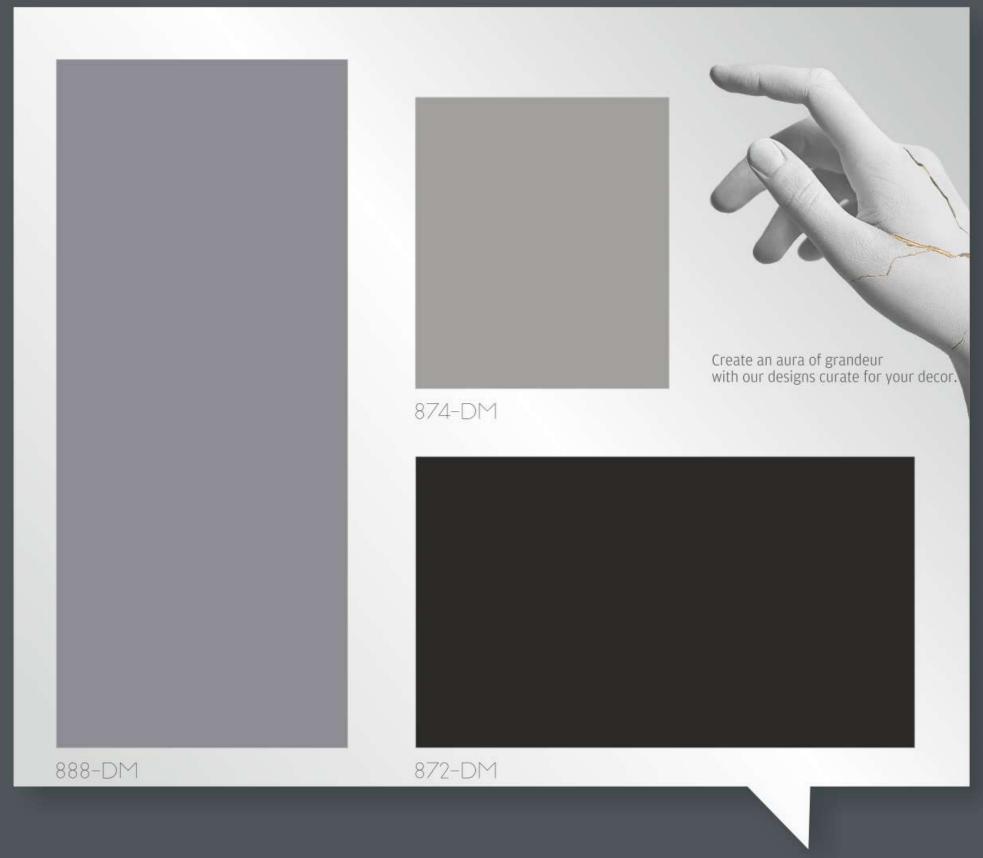

DM 07-08

### DIAMOND



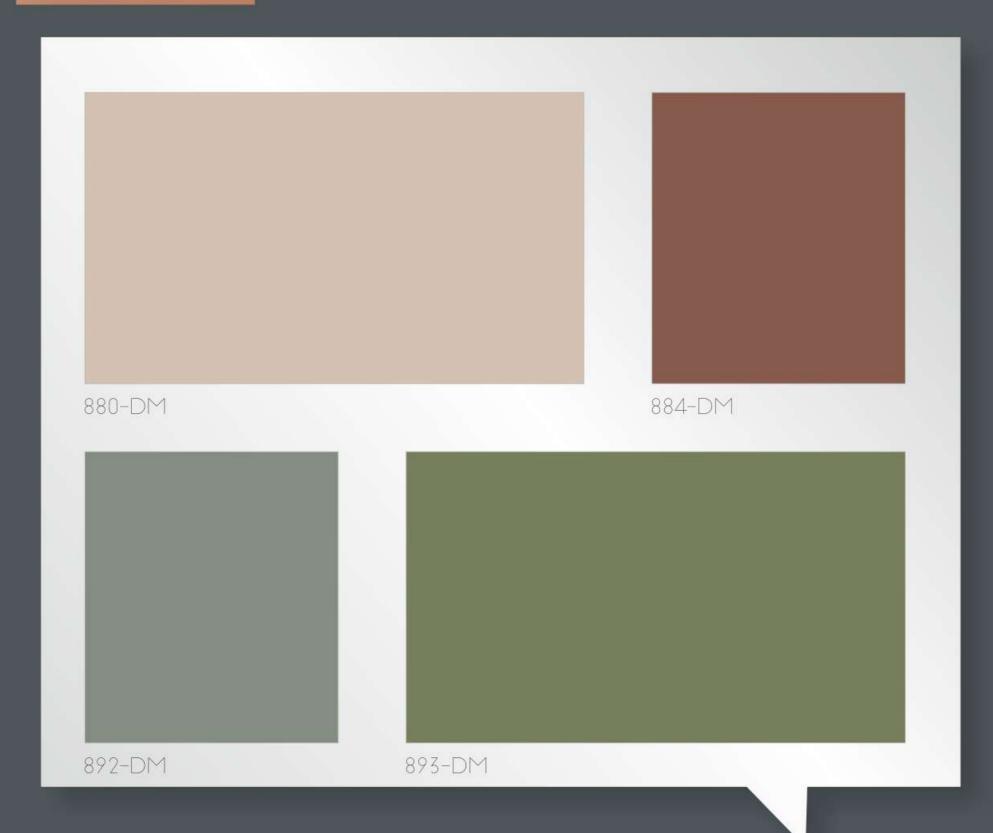




DM 09-10


CHIFFON

# GR, FUII

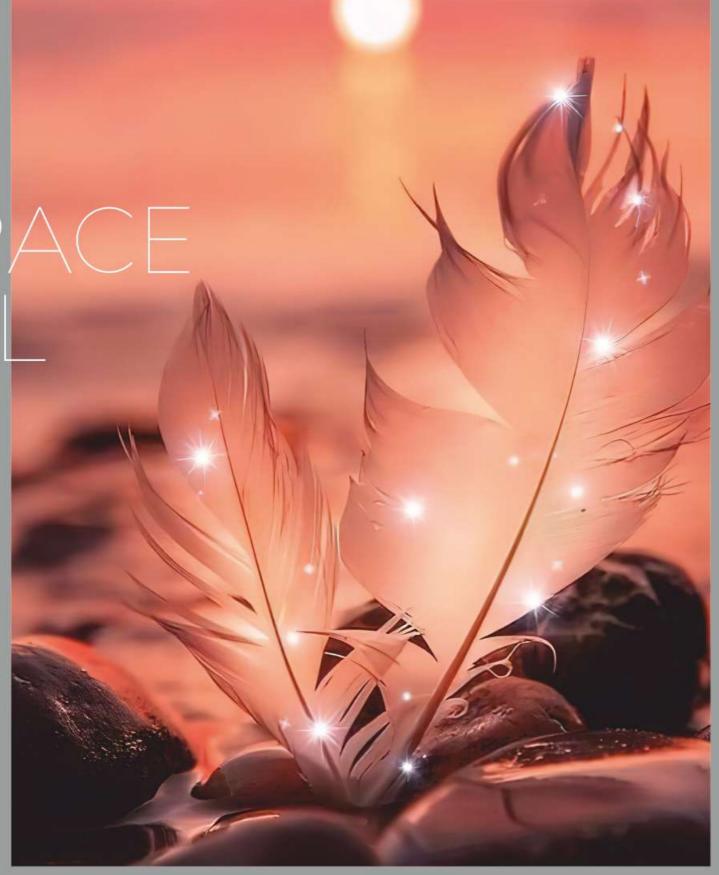


Let your heart decide between these exceptional shades of colors that are sure to take over decor elegantly



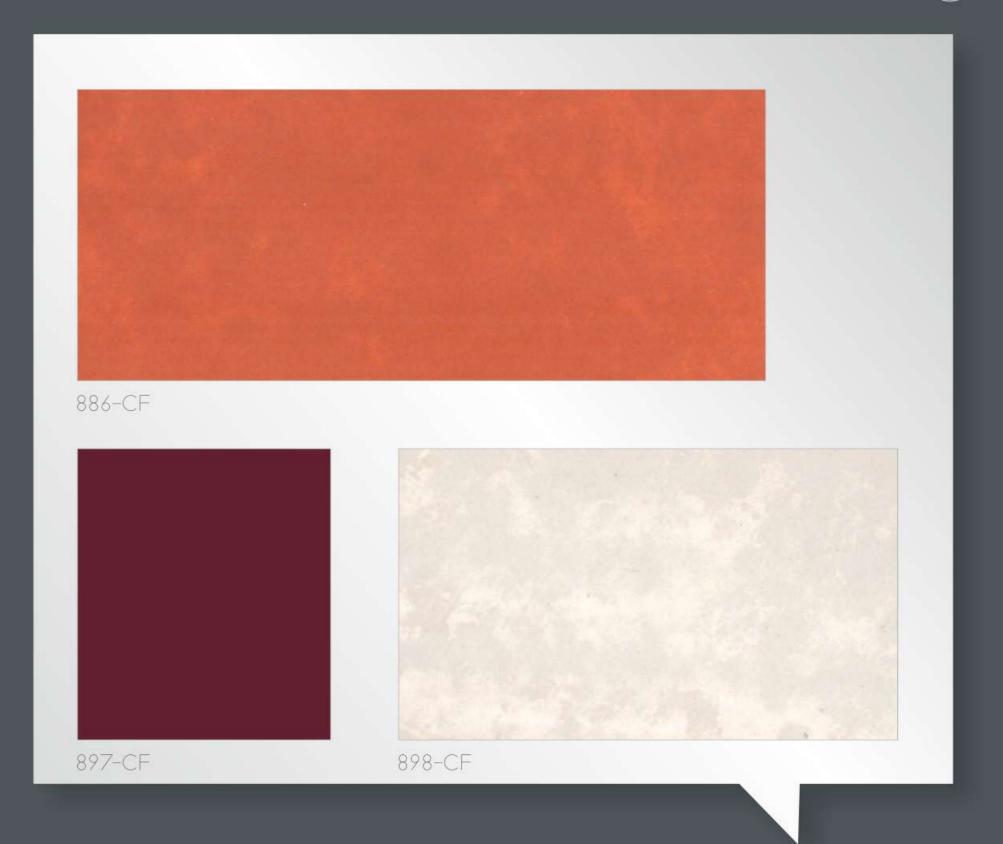

CF 11-12


### CHIFFON

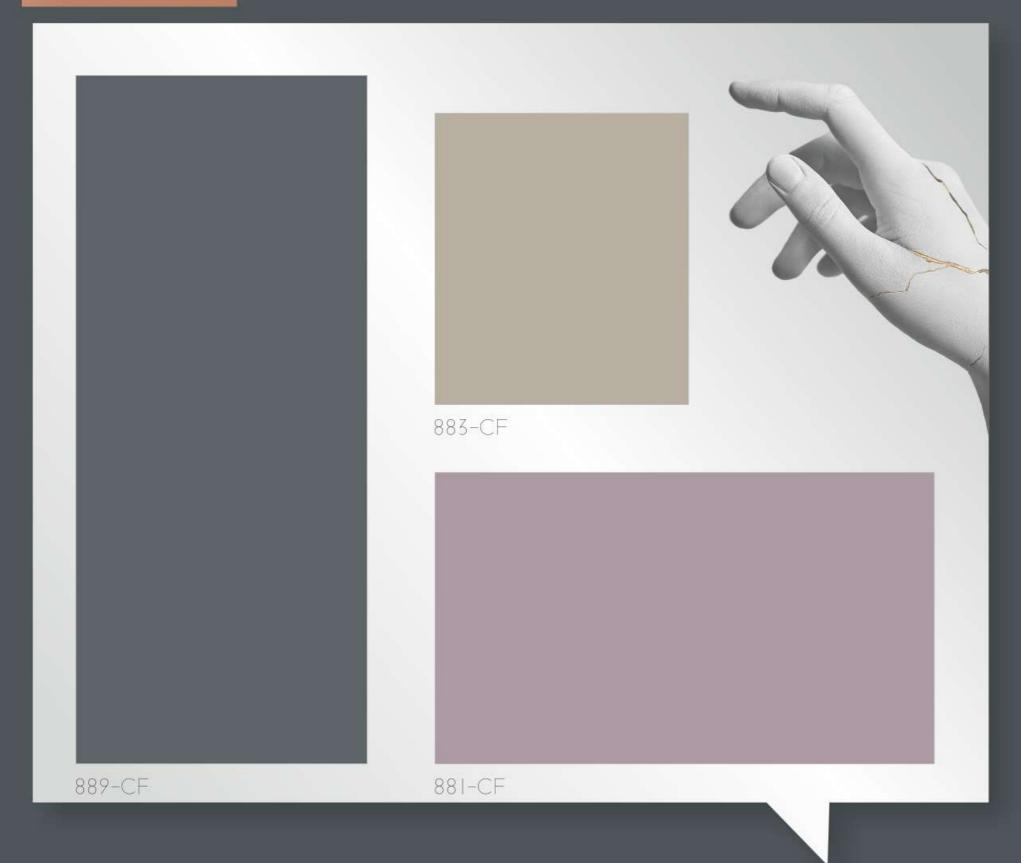



CF 13-14

# REAL LEATHER

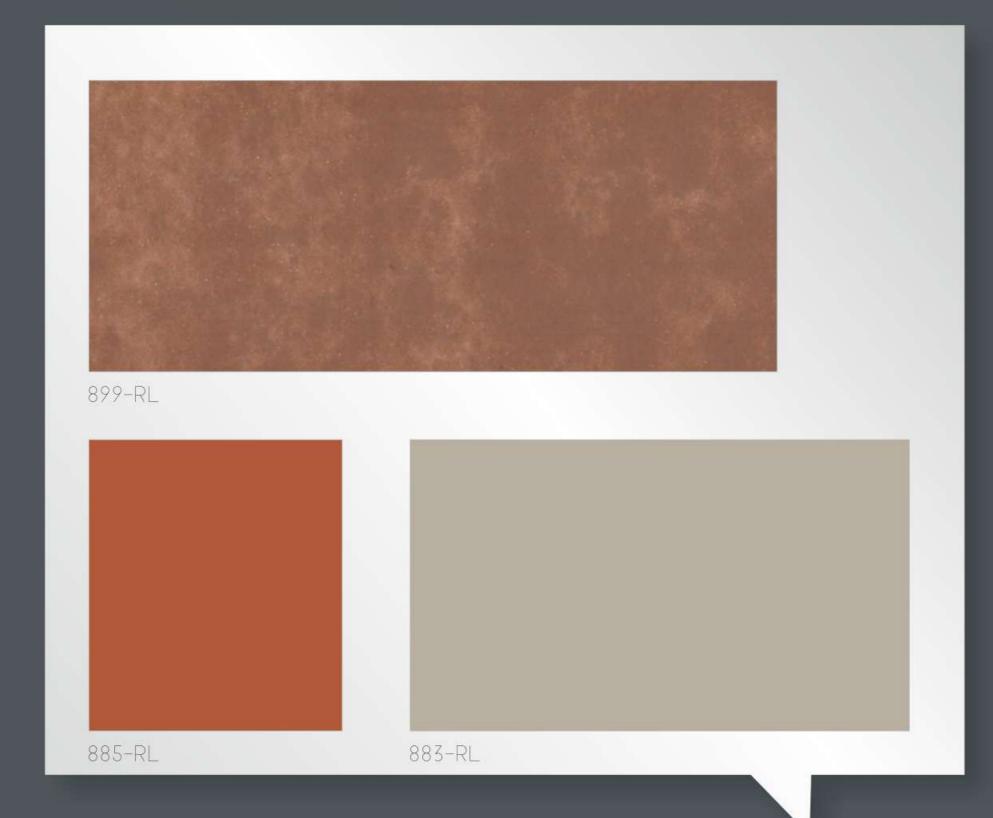










Exude radiance at home with our sparkling designs and sharp finess

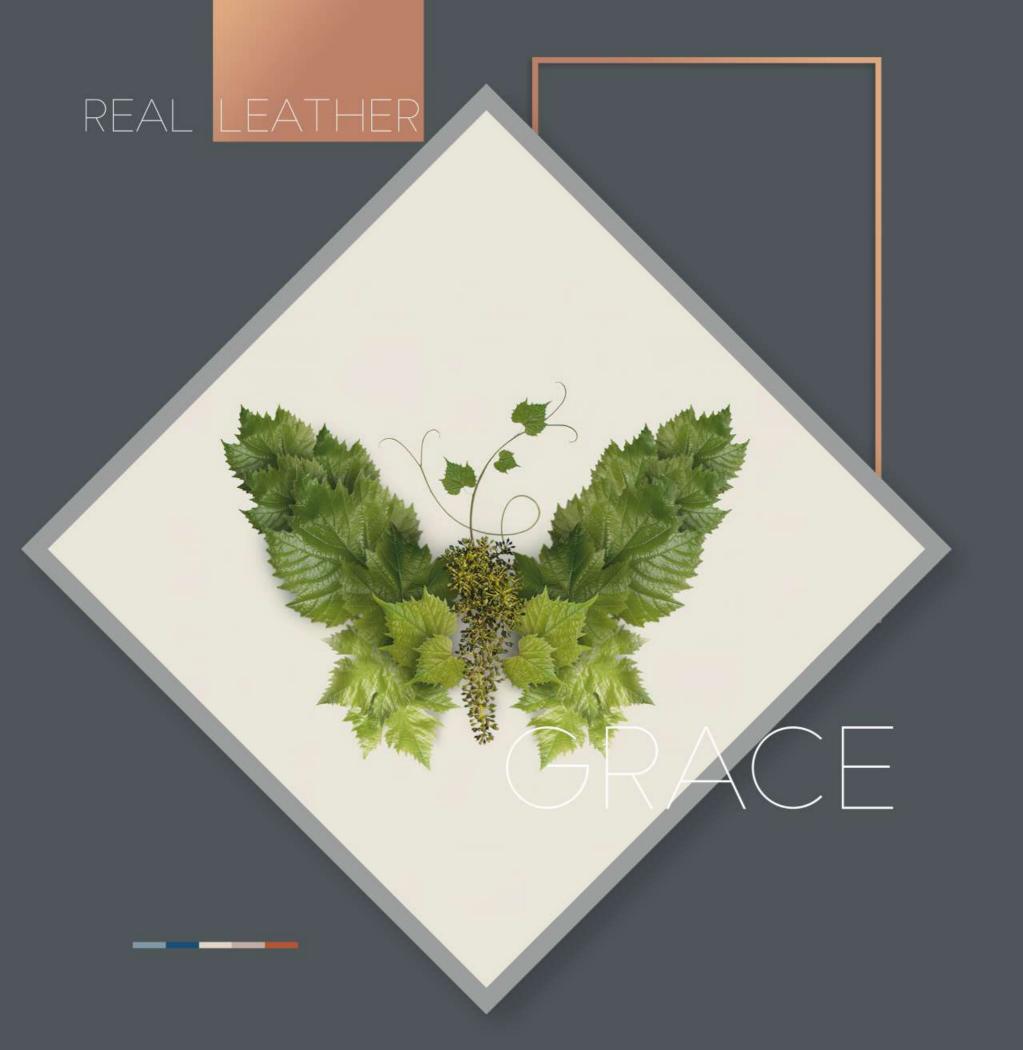







RL 17-18





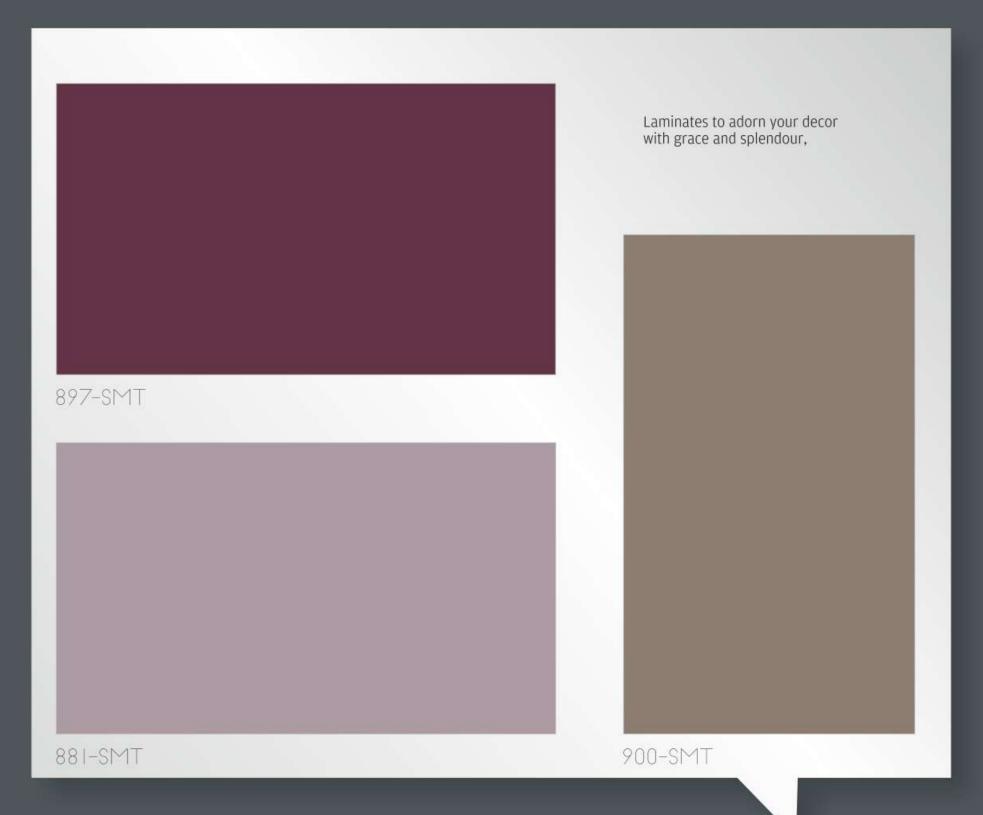



SMT 19-20

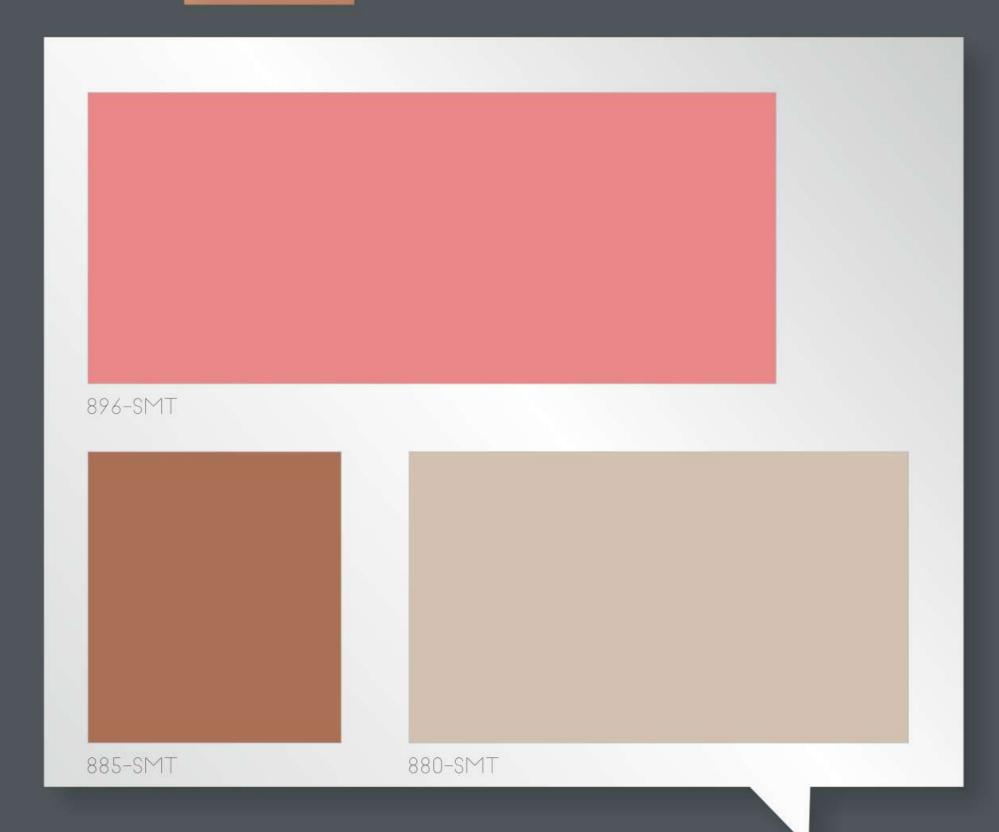



SMT 21-22

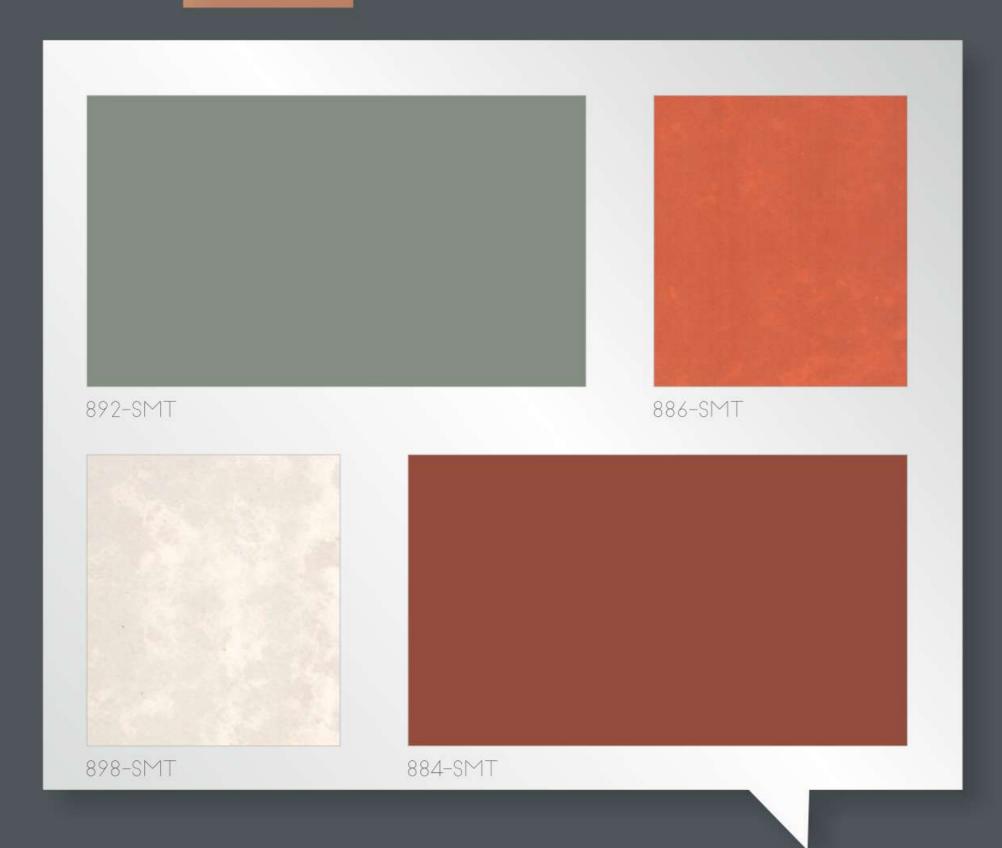


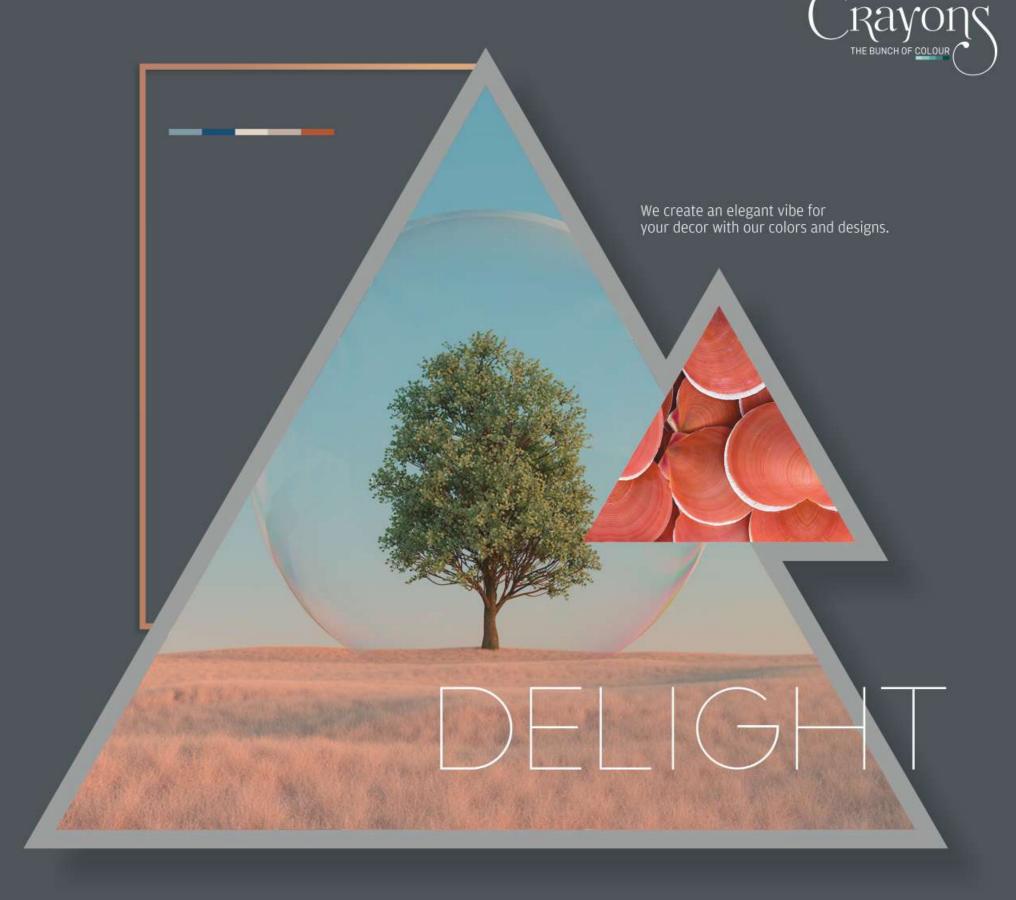

SMT 23-24






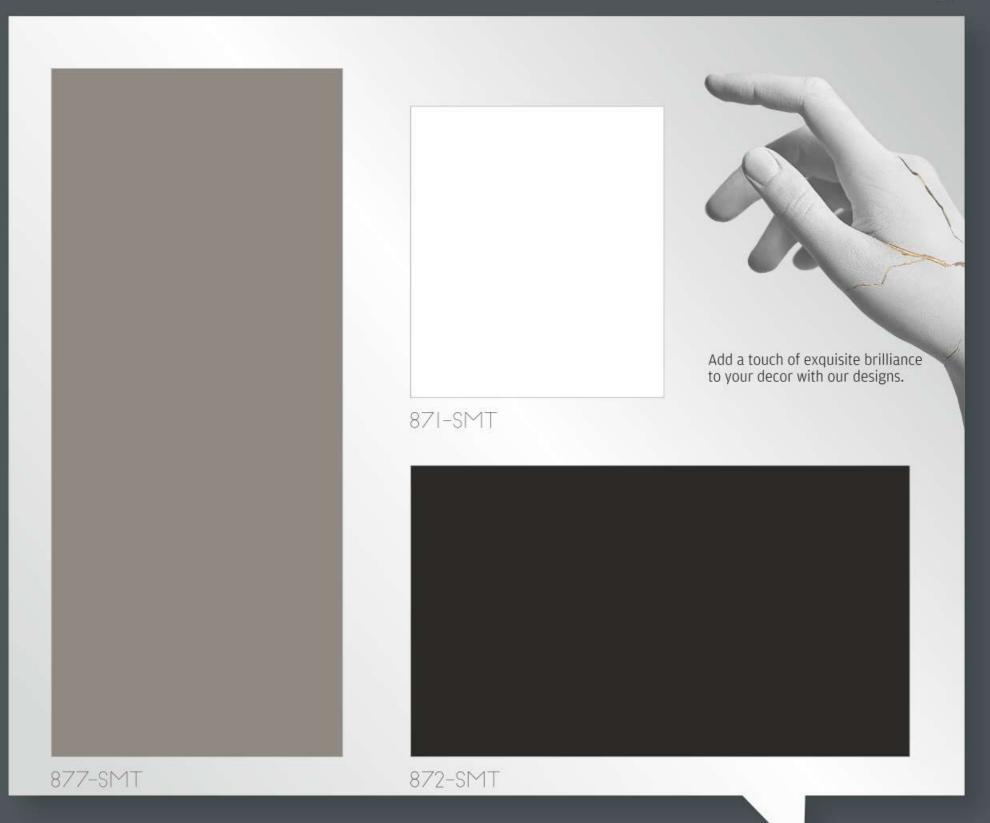






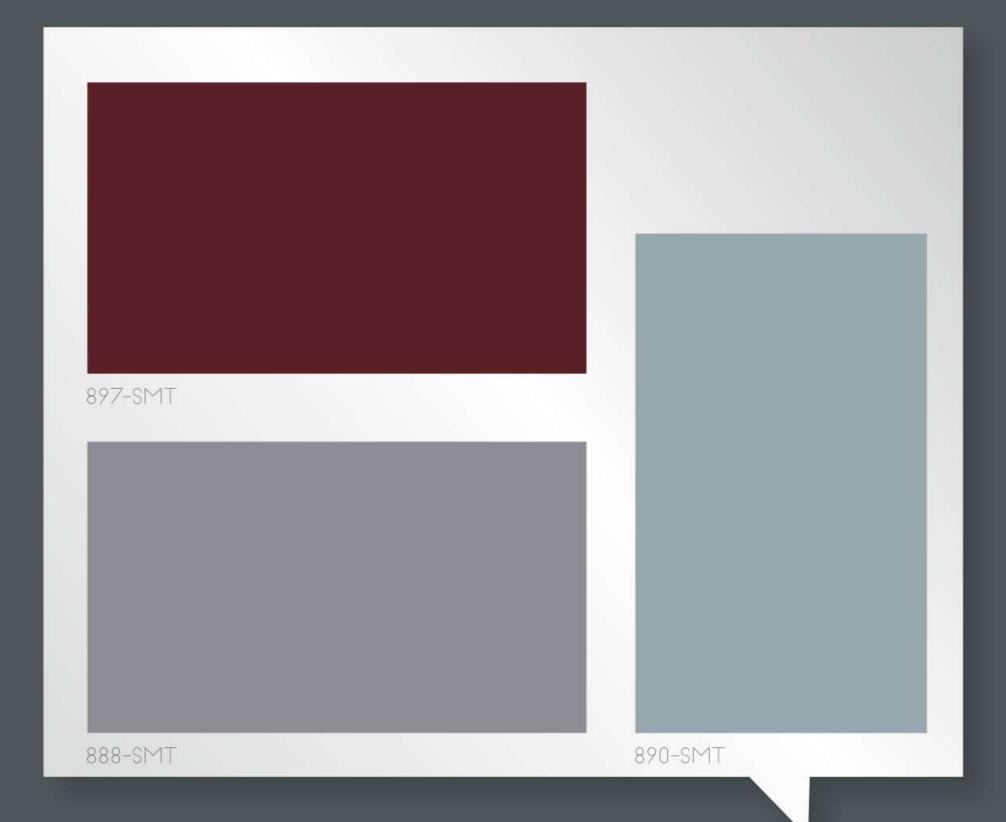



SMT 27-28

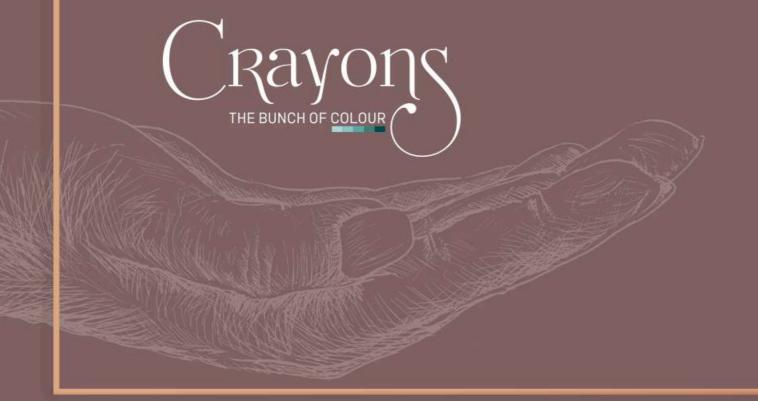

# HIGHGLOSS


### HIGH GLOSS

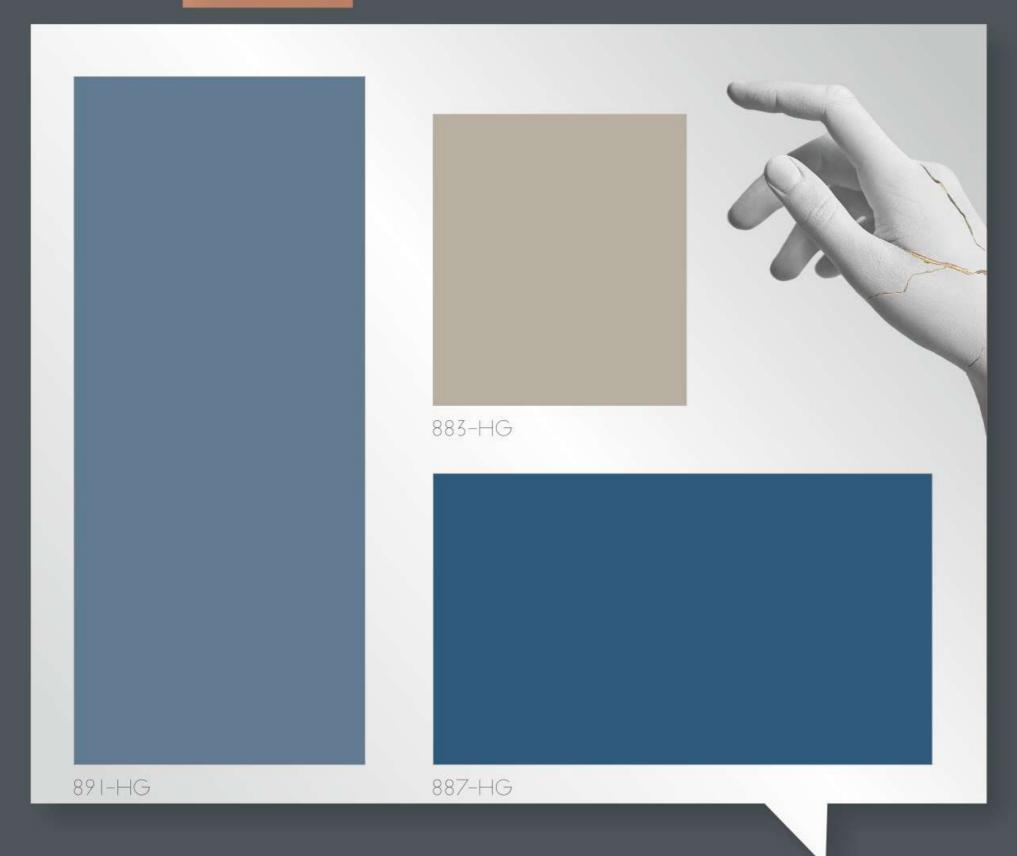

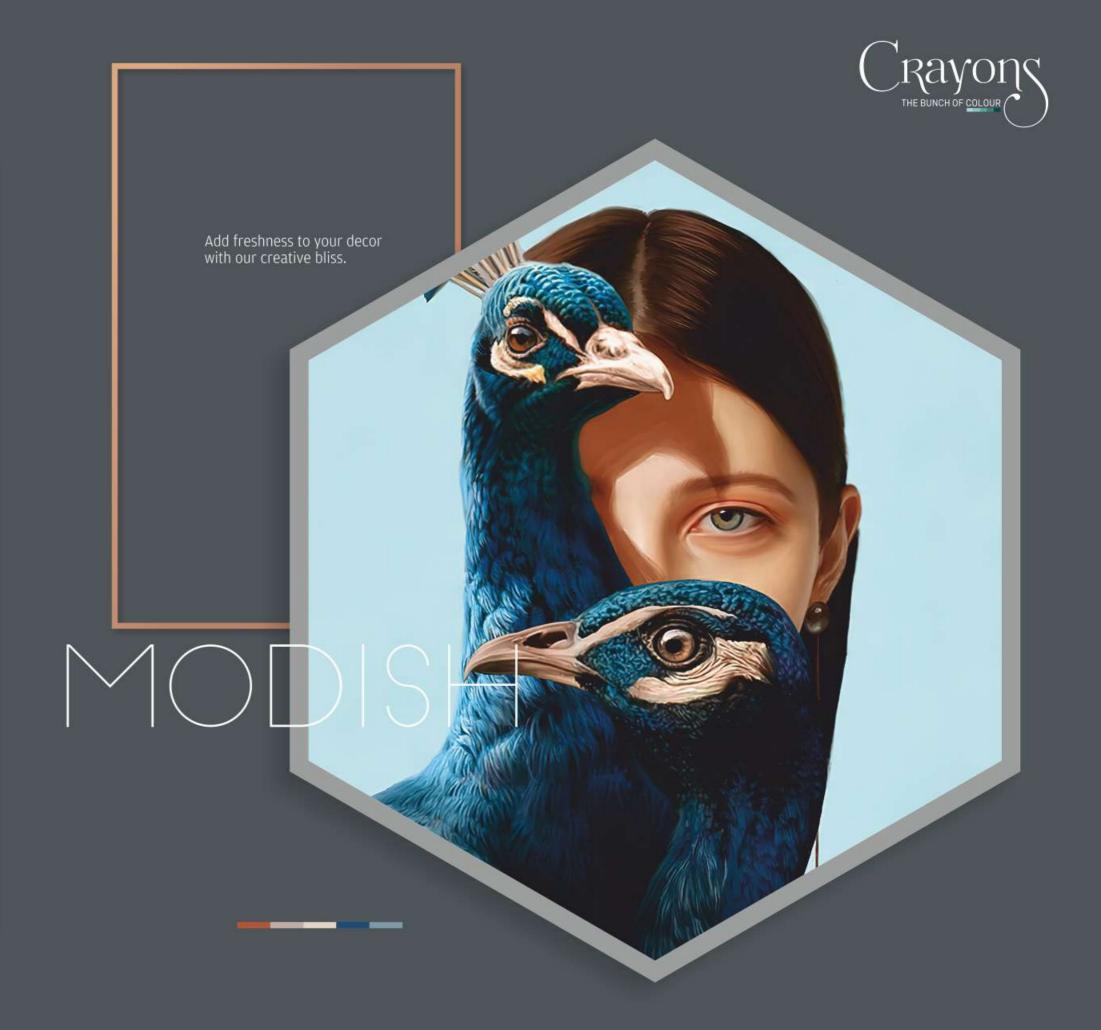






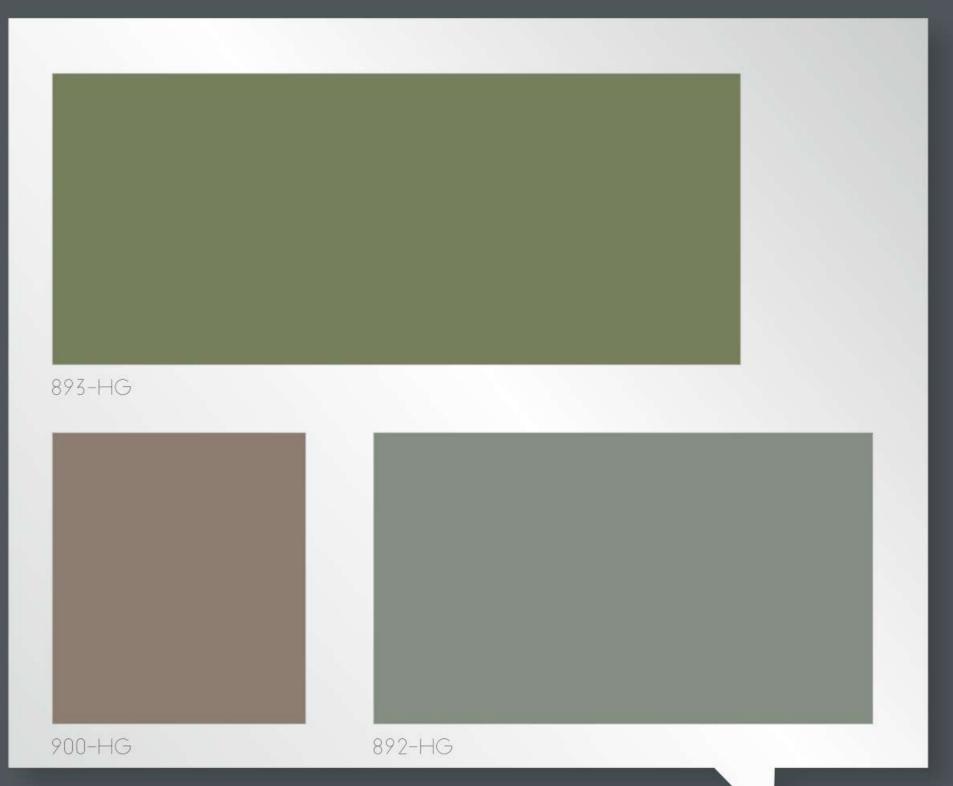






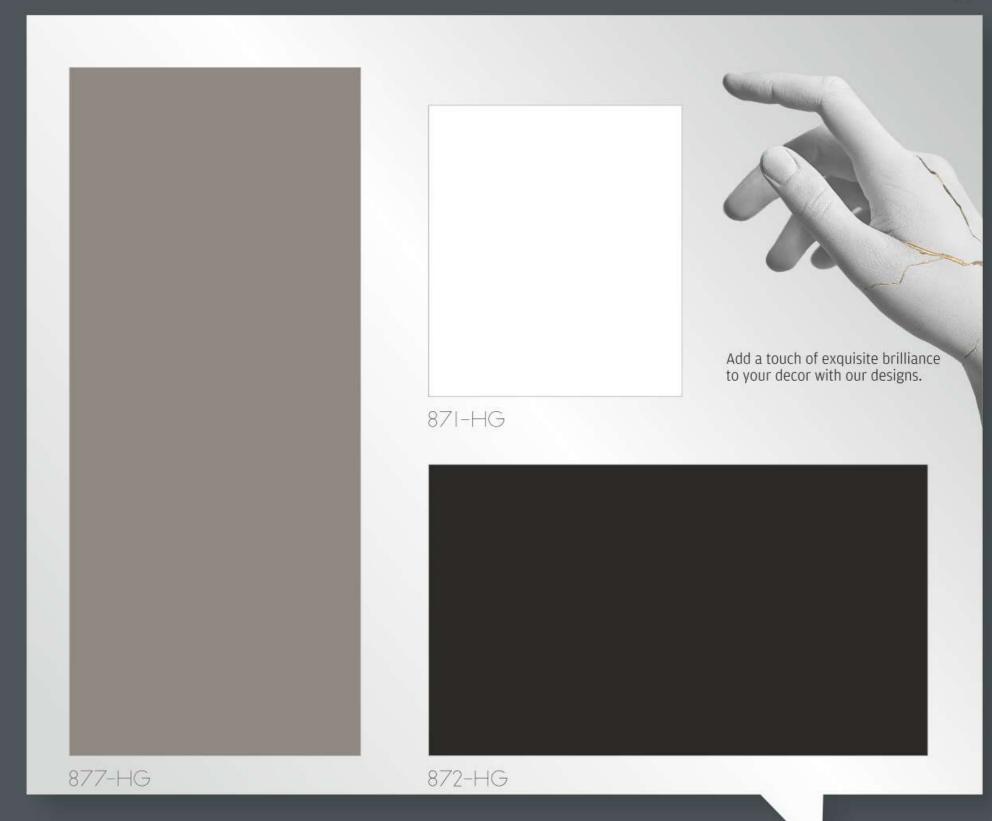

# HIGH GLOSS

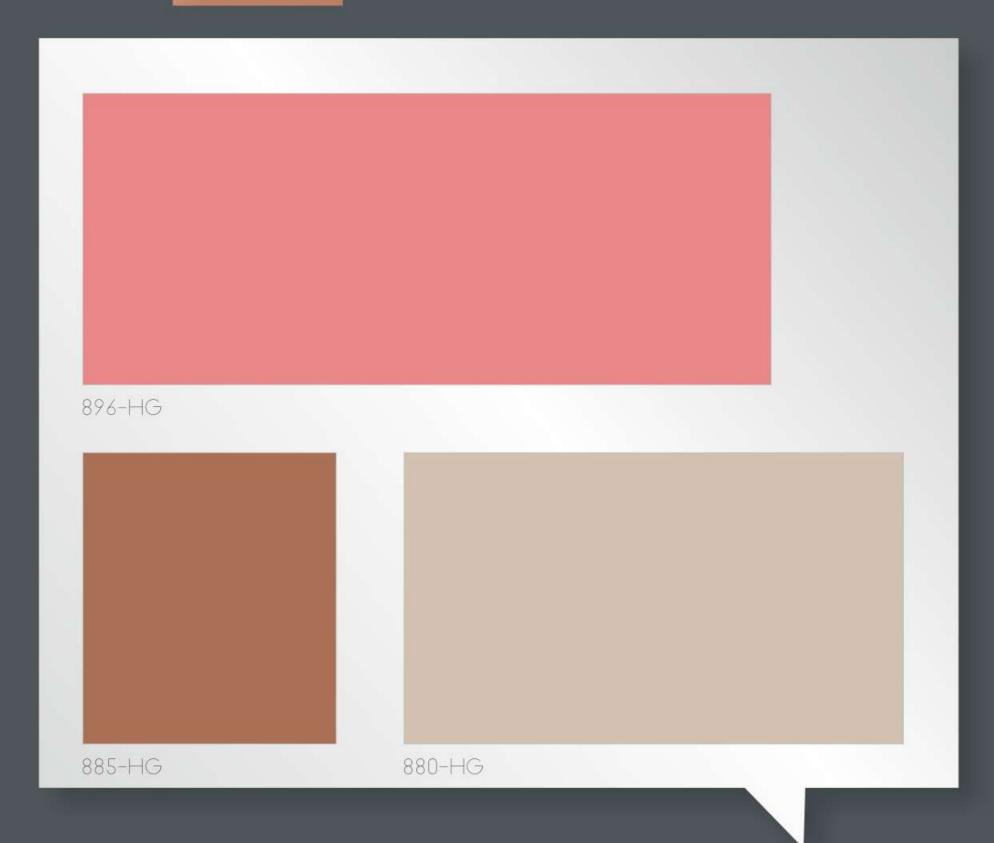



HG 37-38









Add a new dimension to your decor which can charm everyone



Designed for your style and pleasure with creativity and love



Choose the best laminates for your pleasure and glamour

### TECHNICAL



PROPERTIES	IS REQUIREMENT AS PER IS 2046 TYPE S, VGS	99 TONE CONFORMS
Thickness	1.00mm <u>+ 0.10mm</u>	
Surface Defects A) Sports Dirt & Similar Surface defects B) Fibers, Hair, Scratches C) Accumulated of surface defects	Max Contamination area equivalent to 10 mm 2/m2 Max Contamination Length of 10.0 mm / m2 Max, Level for each of the two type of defects shall not exceed half of the levels prescribed in 5.4.1.2.	
Edge Defects	20 max	
Broken Corner	One Broken corner of < 30 mm Or two broken corner of < 15 mm allowed	
Sanding Defects	Slight chatter Marks are allow	
Warping	Max warp 120 mm	
Dimension A) Length B) Width	+ 10 mm, - 0 mm + 10 mm, - 0 mm	
Straightness of Edge	1.5 mm/ M2	
Squareness	1.5 mm/ M2	
Resistance to surface wear Revolution (Min) Index No.	Not Less than 150 (revolution)	
Resistance to A) Mass increase % Max Immersion in B) Thickness increase % Max Boiling Water C) Appearance Grade not worse than	Not More than 12 Not More than 14 Not Less than 4	
Dimensional Stability at A) Length Wise (L) % deviated Temp. (Max) B) Cross Wise (T) %	Not More than 0.65 Not More than 1.15	
Resistance to Scratching, Index No.	Not less than 2	
Resistance Staining A) Group 1 & 2 Grade not worse than B) Group 3 & 4	Not less than 5 Not less than 4	
Resistance Steam (Appearance Grade not worse than)	Not less than 4	
Resistance to Impact by small dia ball (Min), Index No.	Not less than 3	
Resistance to cracking (Appearance Grade not worse than)	Not less than 4	
Resistance to Color change (Wool Standards)- In Xenon arc light In enclosed carbon arc light	Not less than Standard Blue Wool No.: 6	
Surface Finish and reverse side banding	The reverse side of sheets having only one decorative surface shall be suitable for adhesive bonding if so required	



THICKNESS	COLOR
1MM	CRAYONS Range
TYPE/ CORE	SIZE
Standard	3050 x 1300mm/ 4200 x 1600 mm
Do nat use chemicals for cleaning.	Extra care required in vertical pasting of laminates sheet as there is possibility of bubbles due to lack of uniform pressure.
Avoid direct sunlight/ continuous light. These may cause color fading.	Cracking at corners and around cuts may because by improper conditioning, improper bonding and poor planning. Avoid all these to prevent cracking at corners.

TECH 39-40